

DIMENSIONS

Overall depth:	995 mm
Internal diameter:	820 mm
Overall width:	1850 mm
Portal entrance:	590 mm
Swing door entrance:	805 mm
Large total entrance:	1210 mm
Internal Height:	2048 mm
External Height:	2320 mm

PORTAL WEIGHT GUIDELINE

Portal weight with different glass type (it may change upon portal configurations).

C5R with P2A glass: 520 Kg

C5R with P4A glass: 555 Kg


C5R with P6B/BR3 glass: 785 kg

POWER SUPPLY

Input:	110/230 VAC (EMI Filter included)
Output:	13/24 Vdc, 5/7 A/hour
Average Power consumption:	35 watt (per hour of continuous operation)
Max Power Rating:	150 watt
Emergency Battery Back-up:	6-8 hours

MOTORS

Reversible motors with permanent magnet, working power of 24 Vdc, provided with an encoder for the continuous control of the door position. Doors are provided with electronic control of motor torque for door safety stop in presence of an obstacle.

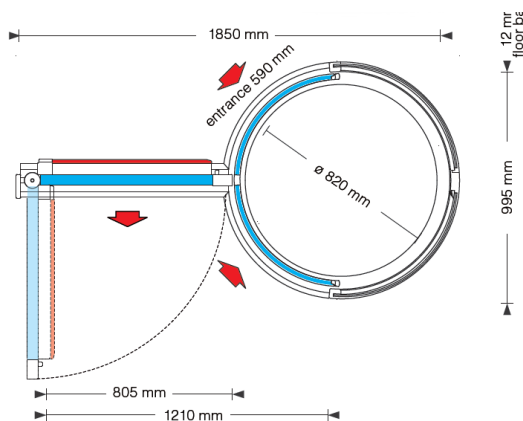

www.biocom.co.il